

Grippler Plus Range

A comprehensive range of wire joiners and tensioners to suit most fence wires, trellis wires or support wires.

ADVANTAGES


- Join and tension in one.
- 4 times faster than knotting or other traditional methods.
- The simple push fit maintains the inherent strength of the wire.
- High load holding.
- Easy maintenance - one-way movement always allows for re-tensioning.
- Optimum corrosion resistance.
- Adjustment feature.
- Use with the Grippler Torq Tensioning Tool for easy installation.




INSTALLATION




Insert 1st wire

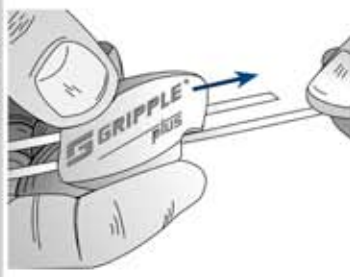

Insert 2nd wire



Tension

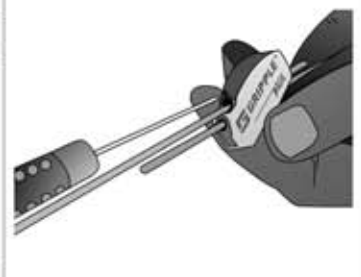

Adjust

- Insert the first wire, then the second to make a wire join.
- Tension with the Grippler Tensioning Tool.
- Use on plain wire, barbed wire or stock fencing.
- Use the setting key for adjustment prior to tensioning.
- Terminate at a post by looping the wire around the post and sliding the Grippler along the wire. Then insert the tail wire back into the unit.

SPECIFICATION

Product	Wire Diameter (mm)	Wire Gauge - ga	Load kg
Grippler Plus SMALL	1.40 - 2.20	17 - 13	300kg / 600lb
Grippler Plus MEDIUM	2.00 - 3.25	14 - 10	400kg / 880lb
Grippler Plus LARGE	3.25 - 4.20	10 - 7 1/2	600kg / 1320lb

TIPS

- Always leave a wire tail of at least 75mm / 3" to allow for re-tensioning.
- Secure tail wires with the Grippler Twister.
- If the Grippler unit is pushed onto the wire too far (pre-load), use the setting key to allow the unit to move backwards.